



HEOS Subwoofer QUICK START GUIDE

BEFORE YOU BEGIN

The HEOS Subwoofer is designed as a Wireless Subwoofer to be connected to your HEOS product.



Make sure you have the following items in working order:



Wi-Fi Router & Internet Connection




Apple iOS, Android or Kindle mobile device connected to your network



Other HEOS devices

STEP 1: UNPACK

Carefully unpack your HEOS Subwoofer.




Verify that the following items are included in the box.




STEP 2: PLAN

Determine which room and HEOS device you wish to group with this HEOS Subwoofer.

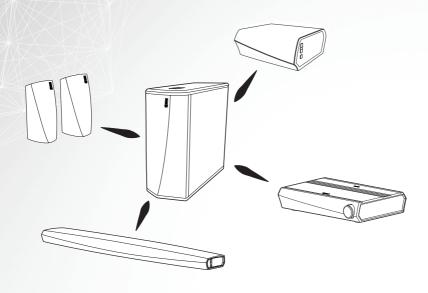

STEP 3: PLACE

Place the HEOS Subwoofer in a convenient location in the same room as the other HEOS devices you wish to group the Subwoofer with.




OPTIONAL

Attach the included feet to the four corners of the HEOS Subwoofer's side if you are placing it on horizontally.



STEP 4: CONNECT


Connect the power cord to the HEOS Subwoofer and a wall outlet.



OPTIONAL


If you are connecting the HEOS Subwoofer to a wired network, connect the included Ethernet cable between the HEOS Subwoofer and your router.

Do not connect the Ethernet cable if you are connecting your HEOS Subwoofer to a wireless network



STEP 5: CONTROL

Download the HEOS App.
Go to the Apple App Store, Google Play or Amazon App Store and search for "HEOS" to download and install.












STEP 6: ADD DEVICE

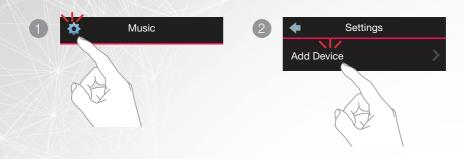

ENJOY!

OWNER'S MANUAL

- For more information, visit <u>www.HEOSbyDenon.com</u>
- Refer to the Online Manual for other functions information and operation procedure details.
 manuals.denon.com/HEOSSW/ALL/EN



BASIC TROUBLESHOOTING

My HEOS device won't connect to my network using the audio cable

- · Make sure your mobile device is connected to your wireless network before setting up your HEOS device.
- Alternatively, you can connect your HEOS device to your network router using the included Ethernet cable. Once connected via Ethernet, the HEOS by Denon App should recognize the HEOS device and you can manually move it to your wireless network using Settings/My Devices/Device Name/Advanced/Network Settings.

Connecting to a network using WPS

If your wireless router supports WPS (Wi-Fi Protected Setup™) your HEOS wireless device can optionally connect to your network using the "Push Button" method by following these steps:

- 1. Press the WPS button on your router.
- 2. Within 2 minutes, Press and Hold the Connect button on the rear panel of the HEOS device for 5 seconds.
- 3. The LED on the front of the HEOS device will flash green for several seconds as it connects to your router.
- 4. When the connection is complete, the LED on the front of the HEOS device will turn solid blue,

Resetting your device

Resetting your HEOS device will clear out the wireless network settings, EQ, and name but retain it's current software. You will have to use Settings->Add Device to reconnect the device to your home network before it can be used.

To reset your HEOS device, gently insert a small paperclip into the Reset button hole on the back and hold it in until the front LED begins to flash amber.

The HEOS by Denon app and brand is not affiliated with any manufacturer of any mobile device.

HEOS and the HEOS logo are trademarks or registered trademarks in the US and/or other countries.

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Google Play is a trademark of Google Inc.

Amazon, Kindle, Fire and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Wi-Fi Protected Setup™ logo is trademark of Wi-Fi Alliance.

All other trademarks are the property of their respective owners.

CONTACT Denon

If you need additional help in solving problems, contact Denon customer service in your area or visit HEOSbyDenon.com

DENON®

HEOSbyDenon.com

Printed in China 5411 11460 00AD Copyright ©2017 D&M Holdings Inc. All Rights Reserved.